


Step 1: License Server

At first determine a license server to which the HASP HL NET dongle will be plugged. This can be a usual computer within your network, to which every GeODin user has access.

Install the license manager as well as the HASP driver on the license server. Please find them both on the DVD or on our website (<http://download.geodin.com/driver/hasp/HASPUserSetup.zip> and http://download.geodin.com/driver/hasp/HASP_Licence_Manager_setup.zip.)

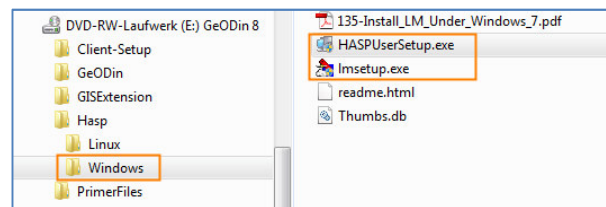

Step 1: License Manager and HASP driver on GeODin DVD

Step 2: License.gnl

The GeODin Support Team provides you with the file License.gnl. Save this file in the CONFIG folder of every participating GeODin installation. License.gnl contains information about the number of licenses and the associated GeODin modules. It enables the clients accessing the licenses.



Step 2: License.gnl

Step 3: NETHASP.INI (optional)

The file NETHASP.INI supports a faster retrieval of the license server and subsequently of the Network Dongle. Open the file with a text editor and enter the server IP address in the provided line. Save it in the BIN folder of the GeODin installation. Please note, this step is not absolutely necessary but recommended when having licensing problems.



Step 3: NETHASP.INI