



GeODin 9 - Installation


Manual

Before you start...

For the installation of GeODin prepare a green-colored HASP HL dongle and a valid GeODin license stored on it.


Plug the HASP HL Dongle on a free USB port of your computer. Quit all running programs and start the installation by double clicking on the **GeODin-Setup.exe**. The GeODin-Setup.exe is included on the **GeODin-DVD** which you can download here:

<http://download.geodin.com/geodin>

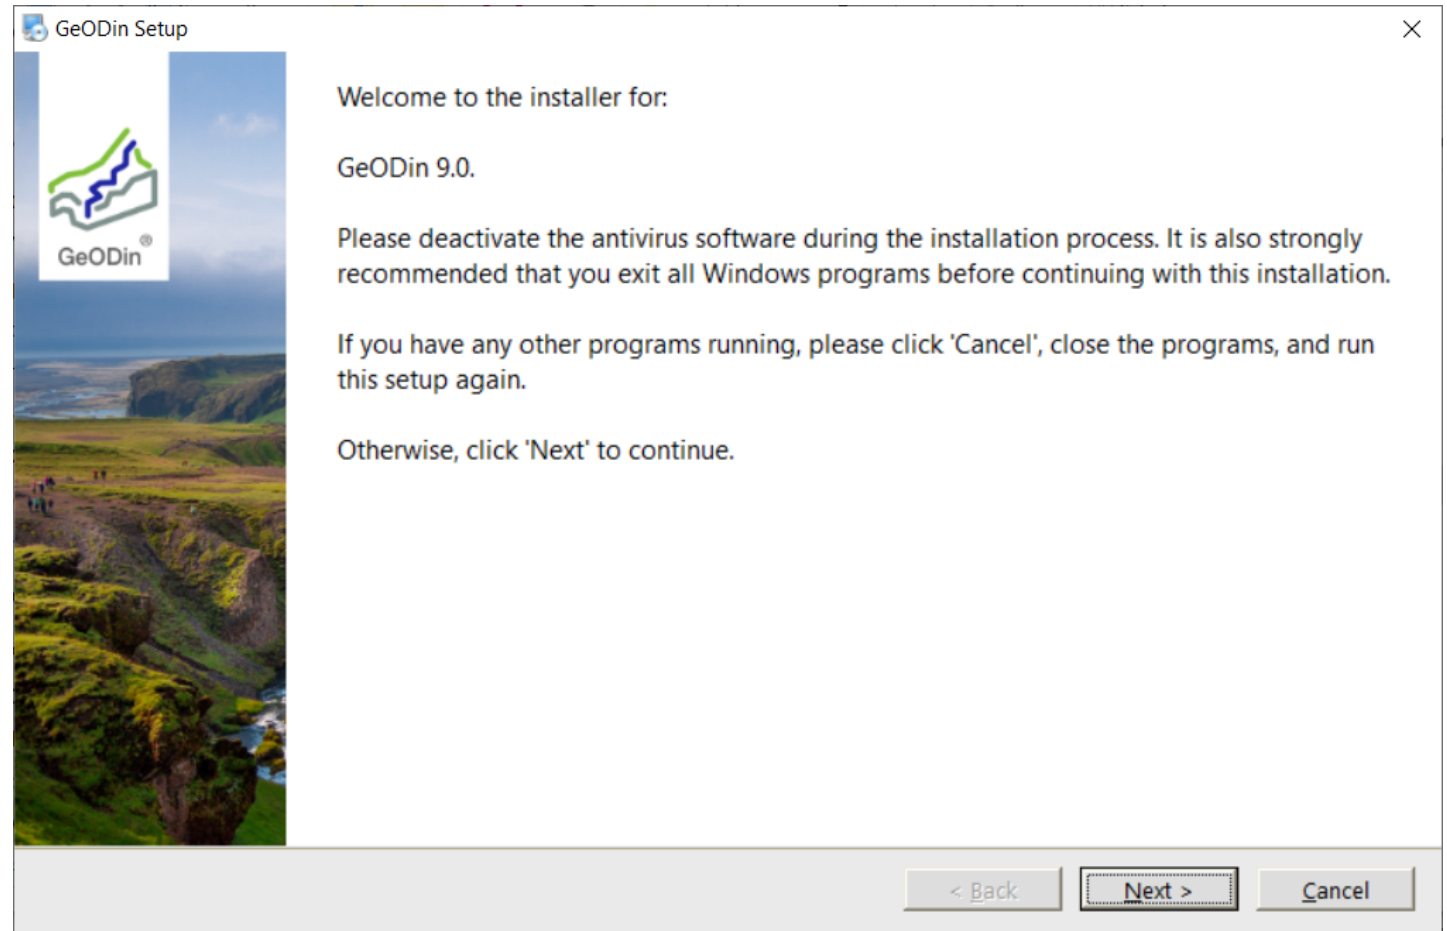


Step 1: License agreement

Please read the license agreement carefully and proceed by accepting it.

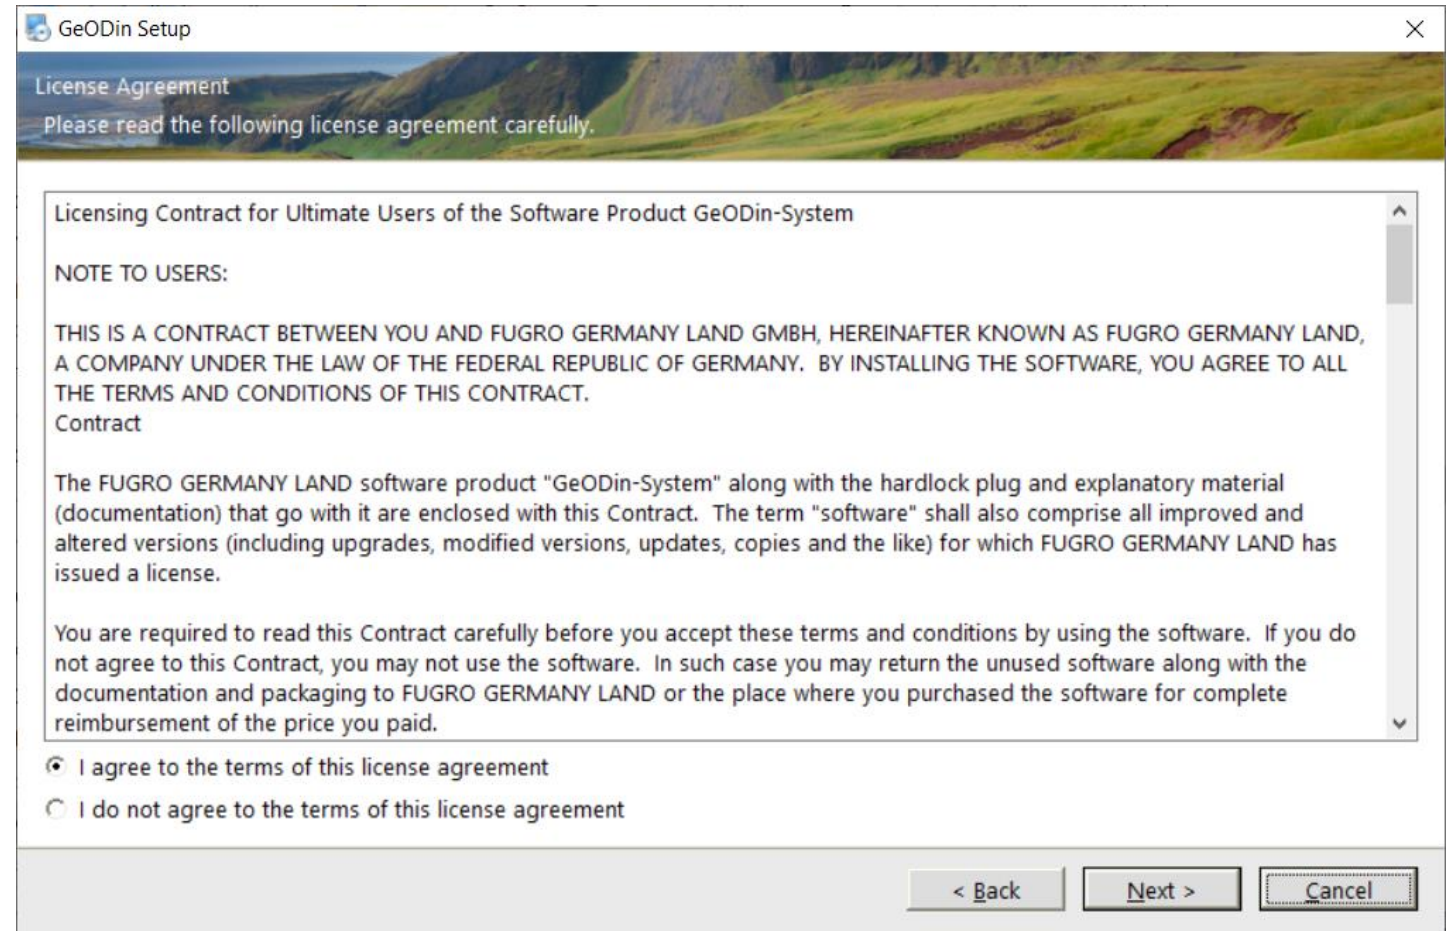

Step 2: Installation type


Select **Single user installation** to install GeODin locally on your computer, or **Network Installation** if you wish to install GeODin centrally on a network drive so that multiple users can work with the same installation (even simultaneously).

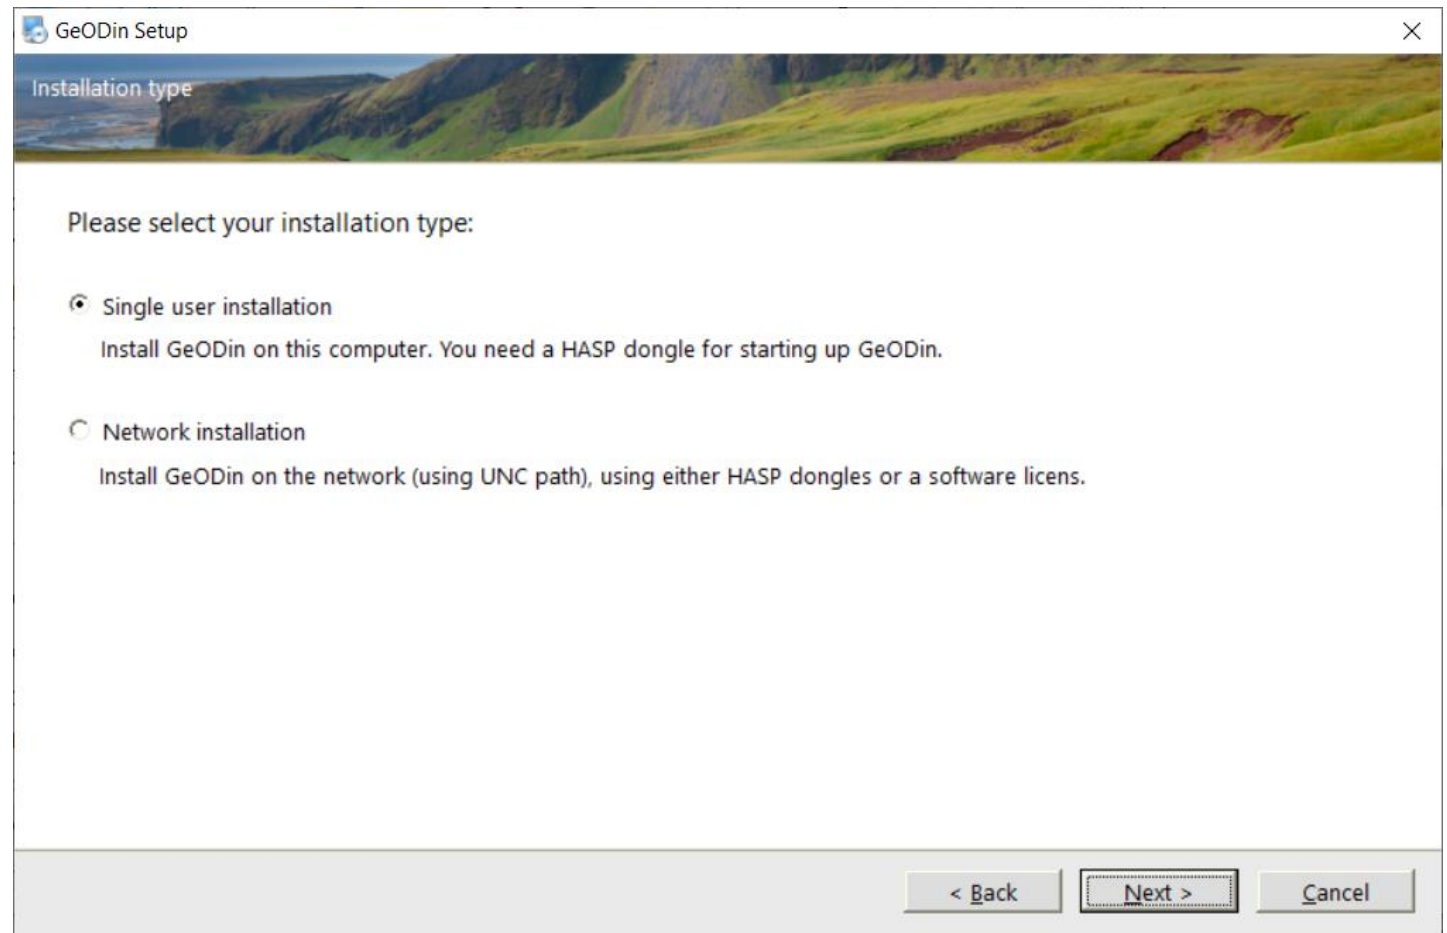

Step 3: Installation path

Determine the directory where you want to install GeODin.

Each directory that requires writing rights for the user (like layout directory, system library) is automatically stored within the installation at *C:\ProgramData\Fugro*. This ensures, that the installation folders are not stored at *C:\ProgramFiles*, where users who have no administrator rights have no writing rights (since Windows Vista).

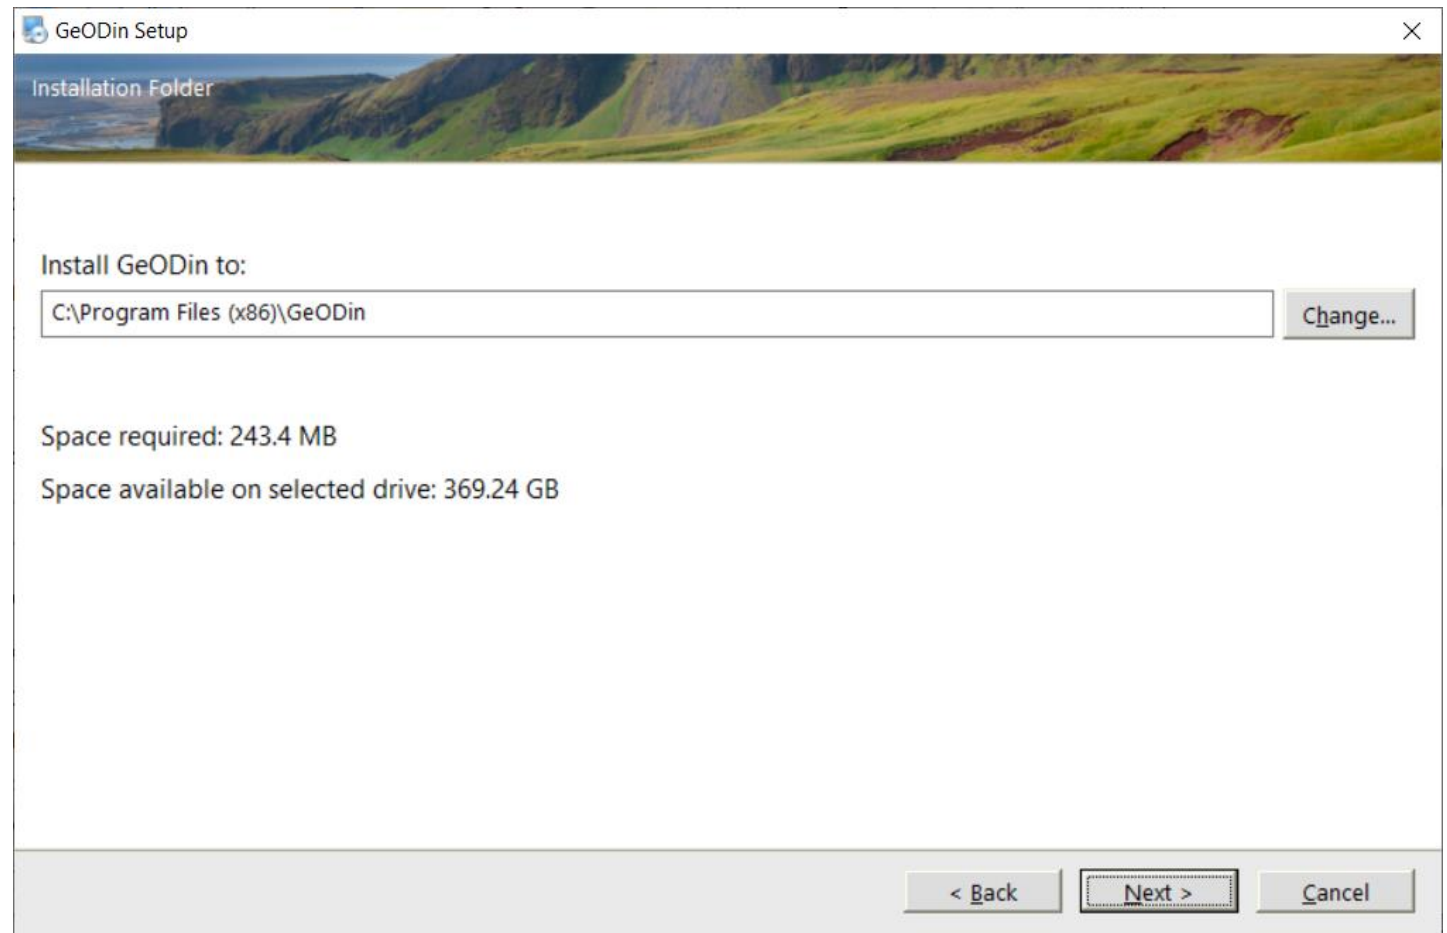


Step 4: Demo databases

You can connect different demo databases to GeODin during the installation process. Select which one you like by placing a checkmark.


Of course, you can still connect the demo databases later. Find them for a download here:

<http://download.geodin.com/demodb>

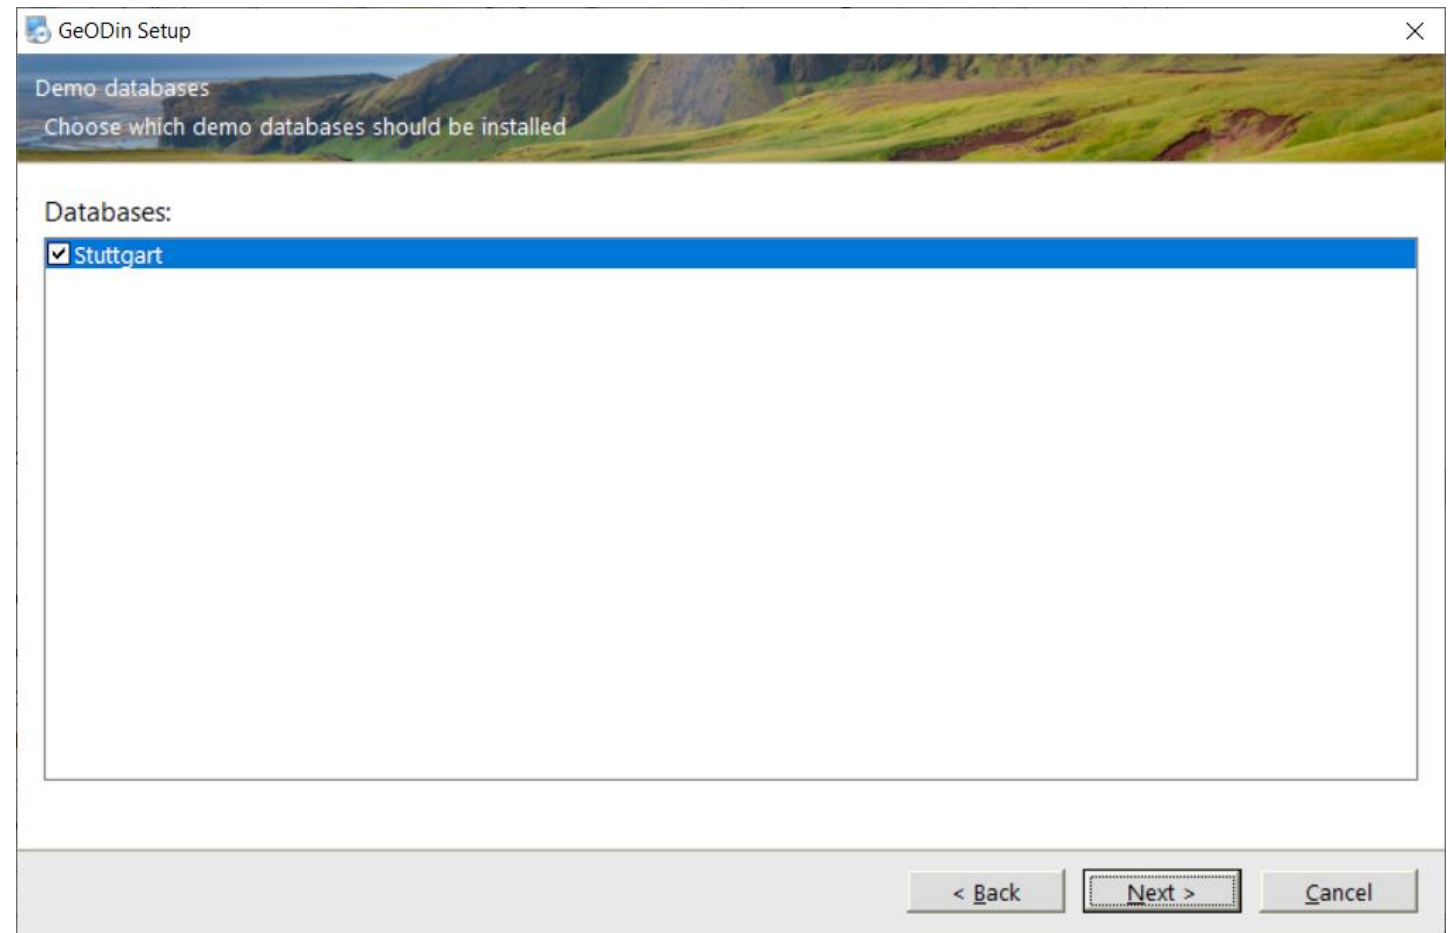

Step 5: Install GeODin


After displaying the previously set installation settings, which you end with <Next>, the program files are installed. This process may take a few minutes.

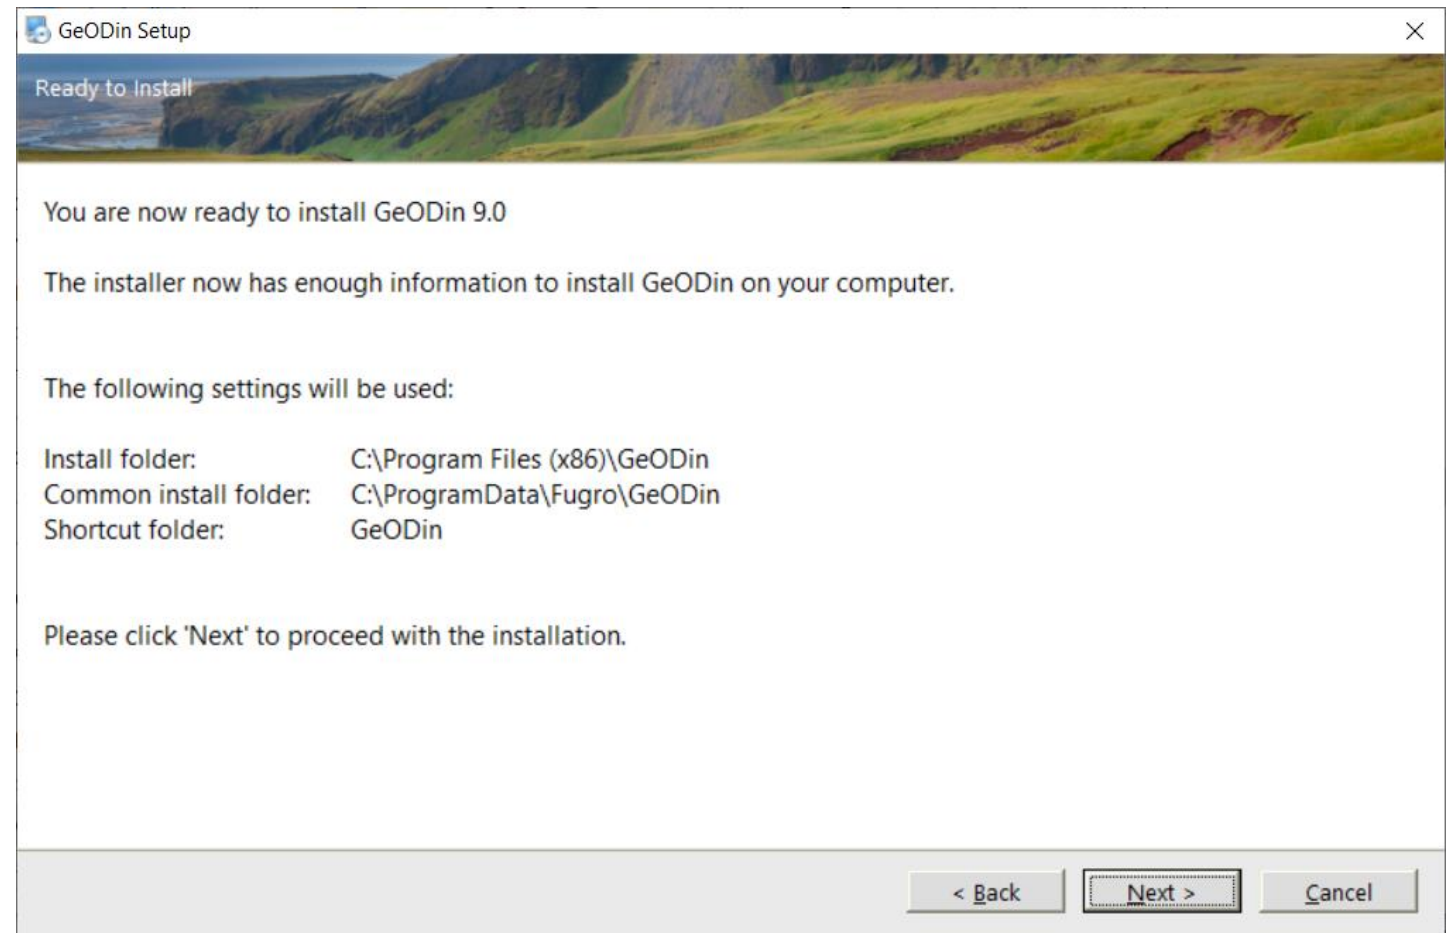

Step 6: HASP HL driver installation

For running a local installation with a dongle, the appropriate **HASP HL driver** must be installed. Set the checkmark and press <Next>.


If there is already a driver installed it is displayed at the bottom. Then a dialogue opens which asks if the existing driver should be replaced by the new one. Confirm <Yes> and follow the instructions of the driver installation.

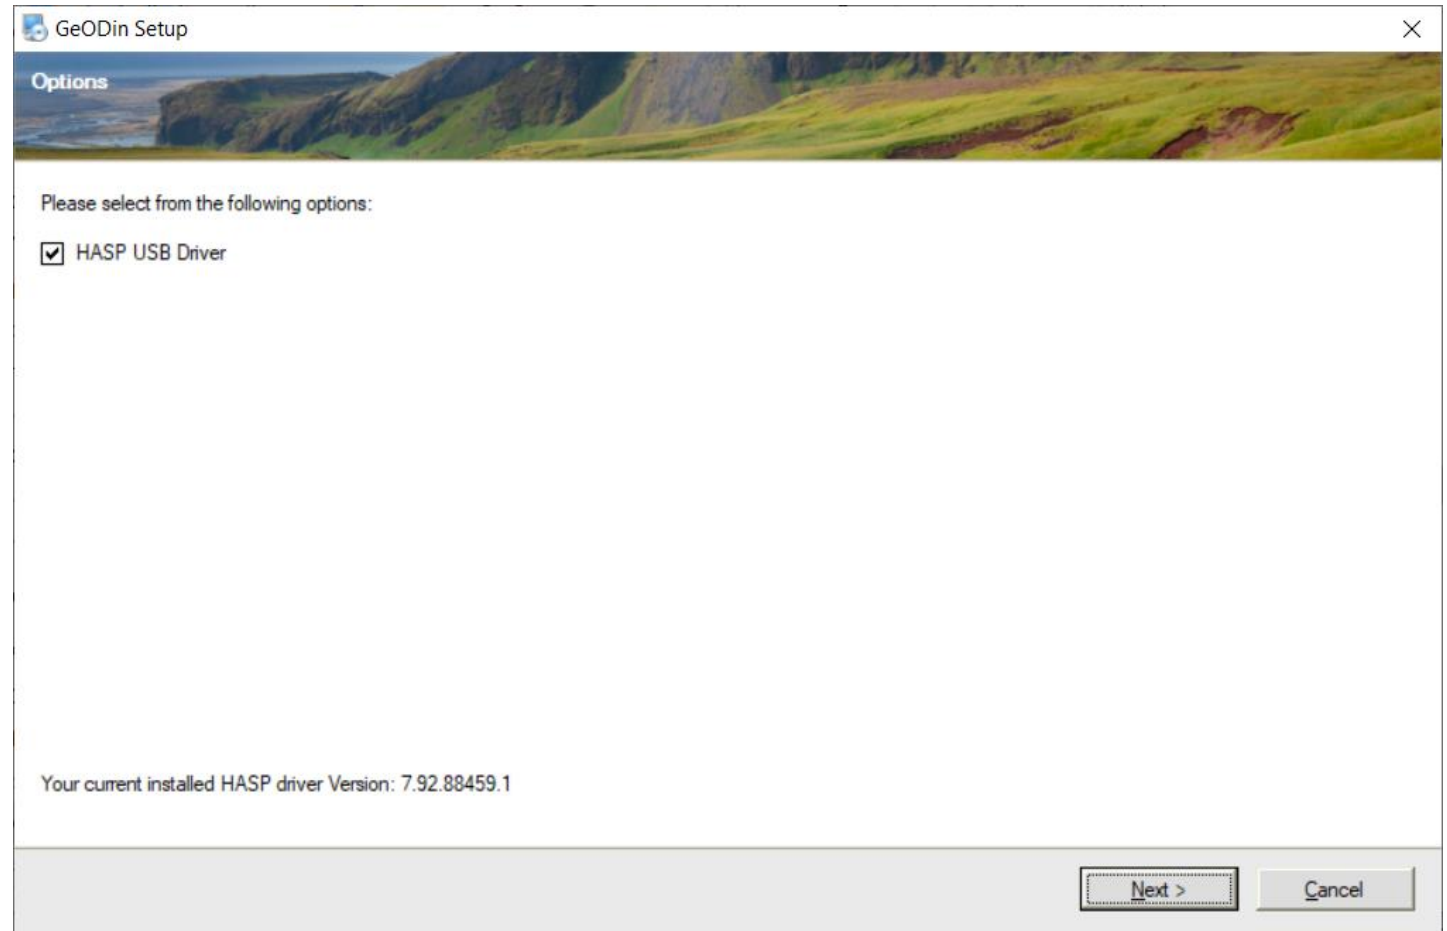

Step 7: Installation successful

If a valid license is present on your dongle GeODin will start.

If a valid GeODin license has not yet been stored on your HASP HL license dongle you will receive an appropriate message and the method "Manage GeODin License" will be started directly. Here you can transfer your valid license file onto your license dongle.

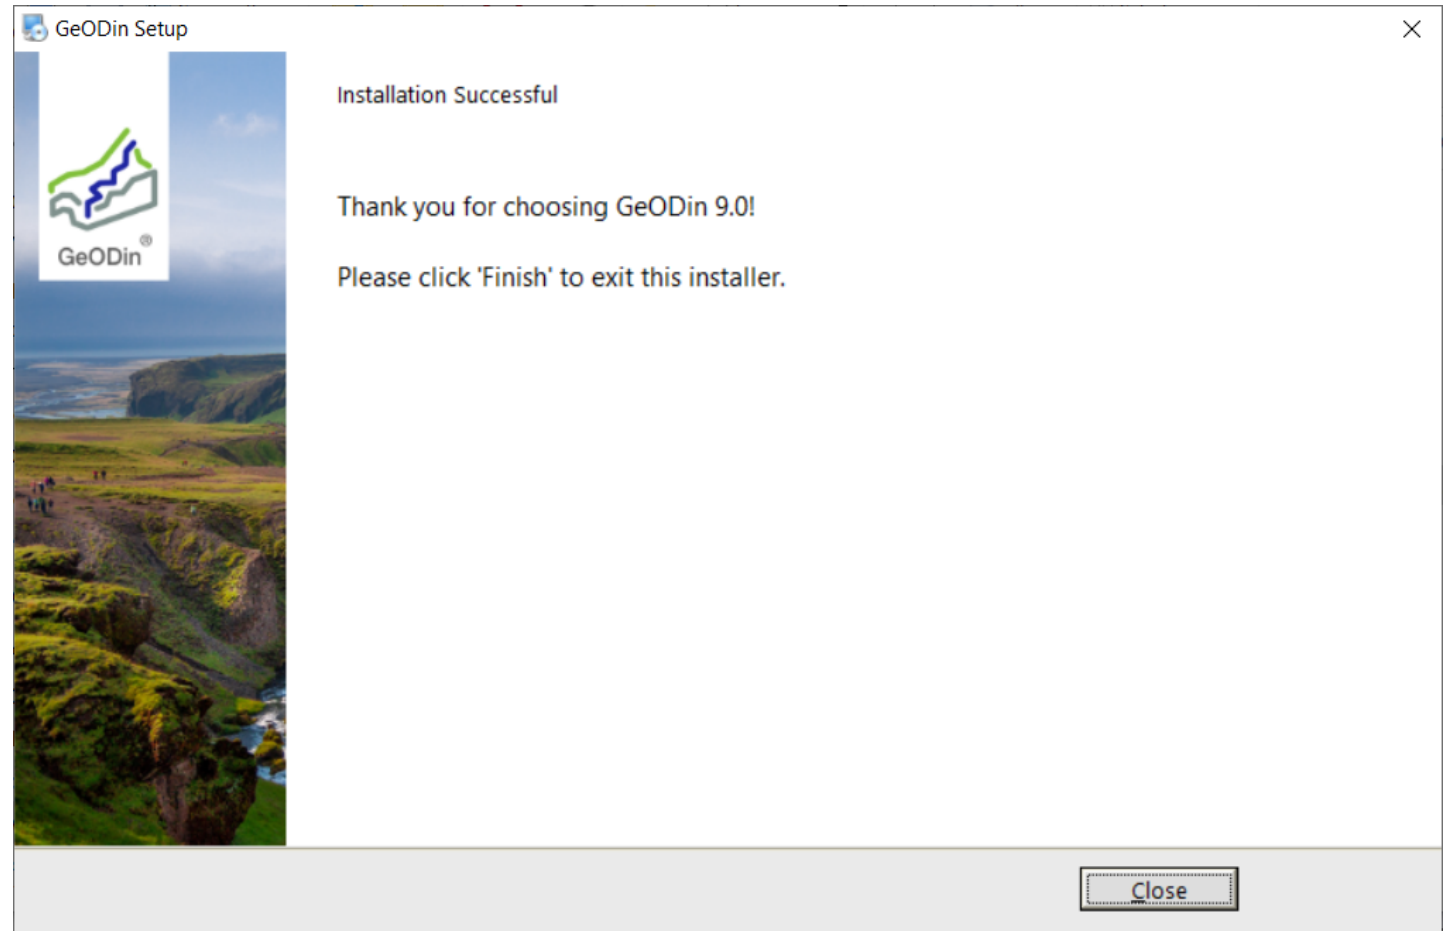



Contact

 +49 (0)30 93651 317

 support@geodin.com

 www.geodin.com